

# PVC Stranded Hook-Up Wires

**G1222** = Product group; Product group discount G 12 2\_

## PVC Stranded Hook-Up Wires

Cross-Section: 0,14mm<sup>2</sup>

Colours: Various

Series: LIYV

### Technical Specifications


Operating Voltage, Max.: .....500V  
Test Voltage: .....>1,2kV  
Outer Diameter, Approx.: .....1,10mm ±0,05mm  
Conductor Cross-Section: .....0,14mm<sup>2</sup>  
Conductor Composition: .....18x0,10mm  
Colours: .....Blue, Green, Red, Black  
Temperature Range: .....-10...+105°C

### Terms of Delivery

Minimum order quantity: 1 PKU = 100m on disposable reel

**Manufacturer:** Various

Part Nr.	Part description
LIYV014BL	Wire LIY-V 0,14mm <sup>2</sup> Blue
LIYV014GN	Wire LIY-V 0,14mm <sup>2</sup> Green
LIYV014RT	Wire LIY-V 0,14mm <sup>2</sup> Red
LIYV014SW	Wire LIY-V 0,14mm <sup>2</sup> Black

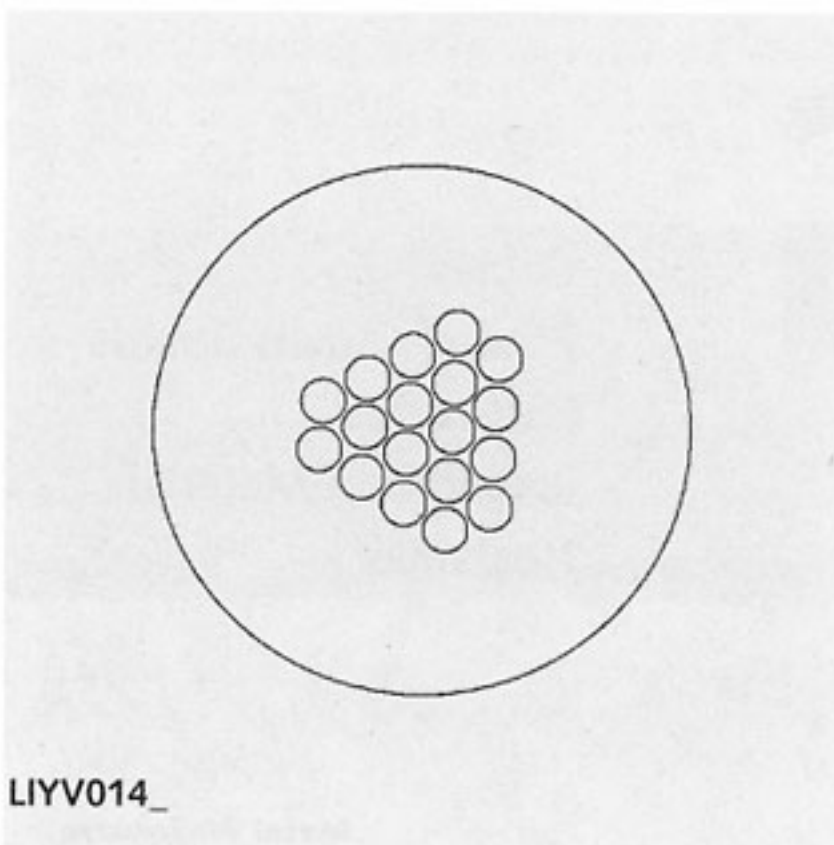

**G1223** = Product group; Product group discount G 12 2\_

## PVC Stranded Hook-Up Wires

Cross-Section: 0,25mm<sup>2</sup>

Colours: Various

Series: LIYV

### Technical Specifications

Operating Voltage, Max.: .....900V  
Test Voltage: .....>2,5kV  
Outer Diameter Approx.: .....1,30mm ±0,10mm  
Conductor Cross-Section: .....0,25mm<sup>2</sup>  
Conductor Composition: .....14x0,15mm  
Colours: .....Blue, Green, Red, Black  
Temperature Range: .....-10...+105°C

### Terms of Delivery

Minimum order quantity: 1 PKU = 100m on disposable reel

**Manufacturer:** Various

Part Nr.	Part description
LIYV025BL	Wire LIY-V 0,25mm <sup>2</sup> Blue
LIYV025GN	Wire LIY-V 0,25mm <sup>2</sup> Green
LIYV025RT	Wire LIY-V 0,25mm <sup>2</sup> Red
LIYV025SW	Wire LIY-V 0,25mm <sup>2</sup> Black

