


## Premium Metallized Polypropylene Film Capacitors – Axial – JFX

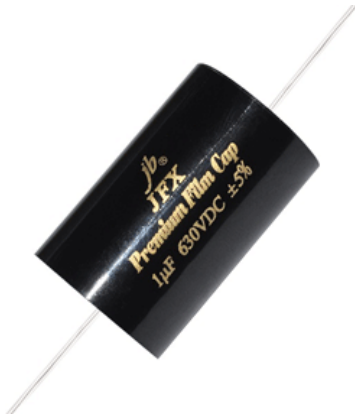


### FEATURES

- Quick transient design
- High Precise Capacitance  $\pm 3\%$ ,  $\pm 5\%$
- Very Low Dielectric absorption factor
- Very Low Dissipation factor
- Very Low ESR
- Very Low Inductance
- Excellent handling of high current audio pulses

### SPECIFICATIONS

Passive flammability	GB10191-88 IEC384-16
Operating temperature	-55°C~+85°C
Capacitance range	0.047~100uF
Capacitance tolerance	$\pm 3\%$ 、 $\pm 5\%$ 1KHz
Rated voltage	250V、400V、630V.DC
Withstand voltage	1.5VR 5S
Dissipation factor	$\leq 0.0020$ 1KHz
Insulate the electric resistance	$> 0.33\mu F$ $\geq 15000M\Omega$
Leads Diameter	0.6、0.8、1.0、1.2 Tinned Pure Copper

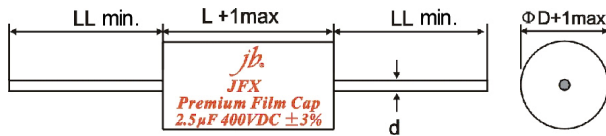

### STANDARD SIZE (mm)

For 0.047uF to 1uF, please consult to our sales for size.

µF	250V					µF	250V				
	Dissipation	OD	L	d	LL		Dissipation	OD	L	d	LL
1.0uF	0.0005	10.5	21	0.8	25	5.1uF	0.0006	17	31	0.8	35
1.1uF	0.0005	11	21	0.8	25	5.6uF	0.0006	18	31	0.8	35
1.2uF	0.0005	12	21	0.8	25	6.0uF	0.0006	18.5	31	0.8	35
1.3uF	0.0005	12.5	21	0.8	25	6.2uF	0.0006	19	31	0.8	35
1.5uF	0.0005	13.5	21	0.8	25	6.8uF	0.0007	19.5	31	0.8	35
1.6uF	0.0005	14	21	0.8	25	7.0uF	0.0007	20	31	1.0	35
1.8uF	0.0005	14.5	21	0.8	25	7.5uF	0.0007	20.5	31	1.0	35
2.0uF	0.0005	13	26	0.8	30	8.0uF	0.0007	21	31	1.0	35
2.2uF	0.0005	14	26	0.8	30	8.2uF	0.0007	21.5	31	1.0	35
2.4uF	0.0005	14	26	0.8	30	9.1uF	0.0007	22.5	31	1.0	35
2.5uF	0.0005	14.5	26	0.8	30	10uF	0.0007	25	31	1.0	35
2.7uF	0.0005	14.5	26	0.8	30	11uF	0.0007	22	36	1.0	35
3.0uF	0.0005	15.5	26	0.8	30	12uF	0.0008	23	36	1.0	35
3.3uF	0.0006	16.5	26	0.8	35	13uF	0.0008	24	36	1.0	35
3.5uF	0.0006	16.5	26	0.8	35	14uF	0.0008	25	36	1.0	35
3.6uF	0.0006	16.5	26	0.8	35	15uF	0.0008	25.5	36	1.0	35
3.9uF	0.0006	17.5	26	0.8	35	16uF	0.0008	26.5	36	1.0	35
4.0uF	0.0006	17.5	26	0.8	35	18uF	0.0008	28	36	1.0	35
4.3uF	0.0006	18	26	0.8	35	20uF	0.0008	29.5	36	1.0	45
4.5uF	0.0006	18.5	26	0.8	35	22uF	0.0009	31.5	36	1.0	45
4.7uF	0.0006	18.5	26	0.8	35	24uF	0.0009	32	36	1.0	45
5.0uF	0.0006	17	31	0.8	35	27uF	0.0009	34	36	1.0	45

## Premium Metallized Polypropylene Film Capacitors – Axial – JFX

μF	250V					μF	250V				
	Dissipation	OD	L	d	LL		Dissipation	OD	L	d	LL
28uF	0.0009	30	46	1.0	45	51uF	0.0013	40.5	49	1.0	45
30uF	0.001	30.5	46	1.0	45	55uF	0.0013	42	49	1.0	45
33uF	0.001	32	46	1.0	45	56uF	0.0013	42.5	49	1.0	45
36uF	0.0011	33	46	1.0	45	62uF	0.0014	39.5	59	1.0	45
39uF	0.0011	34.5	46	1.0	45	68uF	0.0014	41.5	59	1.0	45
41uF	0.0012	35.5	46	1.0	45	75uF	0.0014	43.5	59	1.0	45
43uF	0.0012	36	46	1.0	45	82uF	0.0014	45	59	1.0	45
45uF	0.0012	37	46	1.0	45	91uF	0.0014	47.5	59	1.2	45
47uF	0.0012	39	48	1.0	45	100uF	0.0014	49.5	59	1.2	45
50uF	0.0013	40	49	1.0	45	--	--	--	--	--	--

μF	400V					μF	400V				
	Dissipation	OD	L	d	LL		Dissipation	OD	L	d	LL
1.0uF	0.0005	13	21	0.8	25	7.0uF	0.0007	24	31	1.0	35
1.1uF	0.0005	13.5	21	0.8	25	7.5uF	0.0007	24.5	31	1.0	35
1.2uF	0.0005	14.5	21	0.8	25	8.0uF	0.0007	22.5	36	1.0	35
1.3uF	0.0005	12.5	26	0.8	25	8.2uF	0.0007	23	36	1.0	35
1.5uF	0.0005	13.5	26	0.8	25	9.1uF	0.0007	24.5	36	1.0	35
1.6uF	0.0005	14	26	0.8	25	10uF	0.0007	25.5	36	1.0	35
1.8uF	0.0005	14.5	26	0.8	25	11uF	0.0007	27	36	1.0	35
2.0uF	0.0005	15	26	0.8	30	12uF	0.0008	27.5	36	1.0	35
2.2uF	0.0005	16	26	0.8	30	13uF	0.0008	25	46	1.0	40
2.4uF	0.0005	16.5	26	0.8	30	14uF	0.0008	26	46	1.0	40
2.5uF	0.0005	17	26	0.8	30	15uF	0.0008	26	46	1.0	40
2.7uF	0.0005	17.5	26	0.8	30	16uF	0.0008	27.5	46	1.0	40
3.0uF	0.0005	18.5	26	0.8	30	18uF	0.0008	29	46	1.0	45
3.3uF	0.0006	19	26	0.8	35	20uF	0.0008	30.5	46	1.0	45
3.5uF	0.0006	17.5	31	0.8	35	22uF	0.0009	32	46	1.0	45
3.6uF	0.0006	17.5	31	0.8	35	24uF	0.0009	33.5	46	1.0	45
3.9uF	0.0006	18	31	0.8	35	27uF	0.0009	35.5	46	1.0	45
4.0uF	0.0006	18.5	31	0.8	35	28uF	0.0009	36	46	1.0	45
4.3uF	0.0006	19	31	0.8	35	30uF	0.001	37	46	1.0	45
4.5uF	0.0006	19.5	31	0.8	35	33uF	0.001	40	49	1.0	45
4.7uF	0.0006	19.5	31	0.8	35	36uF	0.0011	41.5	49	1.0	45
5.0uF	0.0006	20.5	31	1.0	35	39uF	0.0011	38.5	59	1.0	45
5.1uF	0.0006	20.5	31	1.0	35	41uF	0.0012	39.5	59	1.0	45
5.6uF	0.0006	22.5	31	1.0	35	43uF	0.0012	40	59	1.0	45
6.0uF	0.0006	22	31	1.0	35	45uF	0.0012	41	59	1.0	45
6.2uF	0.0006	22.5	31	1.0	35	47uF	0.0012	42	59	1.0	45
6.8uF	0.0007	24	31	1.0	35	--	--	--	--	--	--

## Premium Metallized Polypropylene Film Capacitors – Axial – JFX

μF	630V					μF	630V				
	Dissipation	OD	L	d	LL		Dissipation	OD	L	d	LL
<b>1.0uF</b>	0.0005	17	26	0.8	25	<b>5.0uF</b>	0.0006	32	36	1.0	35
<b>1.1uF</b>	0.0005	18	26	0.8	25	<b>5.1uF</b>	0.0006	29	36	1.0	35
<b>1.2uF</b>	0.0005	18.5	26	0.8	25	<b>5.6uF</b>	0.0006	30.5	36	1.0	35
<b>1.3uF</b>	0.0005	19.5	26	0.8	25	<b>6.0uF</b>	0.0007	31.5	36	1.0	35
<b>1.5uF</b>	0.0005	21	26	1.0	25	<b>6.2uF</b>	0.0007	32	36	1.0	35
<b>1.6uF</b>	0.0005	21.5	26	1.0	25	<b>6.8uF</b>	0.0007	33.5	36	1.0	35
<b>1.8uF</b>	0.0005	22.5	26	1.0	25	<b>7.0uF</b>	0.0007	34	36	1.0	35
<b>2.0uF</b>	0.0005	21	31	1.0	30	<b>7.5uF</b>	0.0007	35	36	1.0	35
<b>2.2uF</b>	0.0005	22	31	1.0	30	<b>8.0uF</b>	0.0007	31	46	1.0	40
<b>2.4uF</b>	0.0005	23	31	1.0	30	<b>8.2uF</b>	0.0007	31.5	46	1.0	40
<b>2.5uF</b>	0.0005	23	31	1.0	30	<b>9.1uF</b>	0.0007	33	46	1.0	40
<b>2.7uF</b>	0.0006	24	31	1.0	30	<b>10.0uF</b>	0.0007	34.5	46	1.2	40
<b>3.0uF</b>	0.0006	25	31	1.0	30	<b>11.0uF</b>	0.0007	36	46	1.2	40
<b>3.3uF</b>	0.0006	26.5	31	1.0	35	<b>12.0uF</b>	0.0008	37.5	46	1.2	40
<b>3.5uF</b>	0.0006	27	31	1.0	35	<b>13.0uF</b>	0.0008	40	49	1.2	40
<b>3.6uF</b>	0.0006	27.5	31	1.0	35	<b>14.0uF</b>	0.0008	37	59	1.2	45
<b>3.9uF</b>	0.0006	26	36	1.0	35	<b>15.0uF</b>	0.0008	38	59	1.2	45
<b>4.0uF</b>	0.0006	26	36	1.0	35	<b>16.0uF</b>	0.0008	39	59	1.2	45
<b>4.3uF</b>	0.0006	27	36	1.0	35	<b>18.0uF</b>	0.0008	41.5	59	1.2	45
<b>4.5uF</b>	0.0006	27.5	36	1.0	35	<b>20.0uF</b>	0.0008	43.5	59	1.2	45
<b>4.7uF</b>	0.0006	28	36	1.0	35	--	--	--	--	--	--

Please visit our website to get more update data, those data & specification are subject to change without notice.