
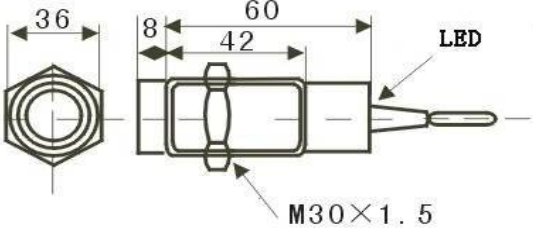


INDUCTIVE PROXIMITY SWITCH

Outward appearance code		LM30		
Appearance				
Dimension				
Non-flush	Detection distance		25mm	
	DC 10	NPN	NO	33025NA
			NC	33025NB
			NO+NC	33025NC
	~ 30	PNP	NO	33025PA
			NC	33025PB
			NO+NC	33025PC
	V	two wire system	NO	
			NC	
	AC 90 ~250	SRC Control label silicon	NO	
NC				
NO+NC				
Relay output				
Control output	DC		200mA	
	SCR/Relay		300mA	
Output voltage drop DC/AC		DC<3V AC<10V		
Consumption current		DC<15mA AC<10mA		
Standard detected object		30×30×1(A3 iron)		
Repeated precision		0,05		
DC/AC Response frequency		200Hz/25Hz		
Working environment temperature		-25°C~75°C		
Insulation resistance		50MΩ		
Shell material		Metal		
Protection grade		IEC standard IP67		
Alternative model at home and abroad		E2E-X18M□		